


Email all enquiries to: **sales@tcrderby.com**
 Tel: 01332 208206
 Fax back to: 01332 208204
 Text or WhatsApp: 07940438419



Company:
 Account No.
 Address:
 Postcode:
 Tel:
 Fax:
 Mobile:
 Contact Name:
 Job Ref:

Required delivery date: / /

GIVE ALL DIMENSIONS IN MILLIMETRES TO INTERNAL KERB / UPSTAND

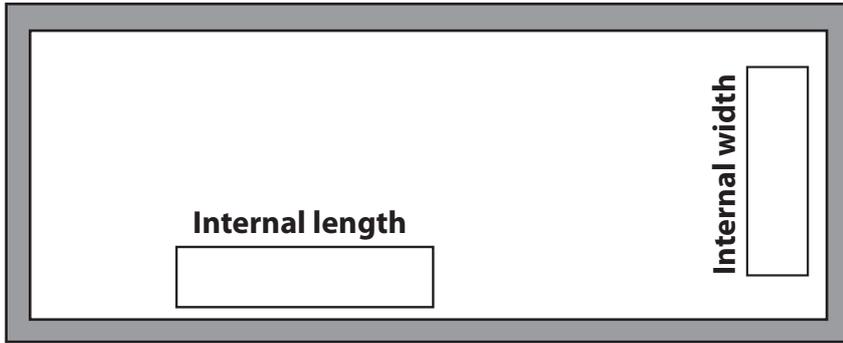

Timber kerb



Roof Covering
 Max thickness
 5mm - 10mm

The minimum height of the kerb must be 150mm at it's lowest point. The kerb must have a pitch of 4 degrees

Min 150mm



width = smallest dimension

KERB WIDTH WILL BE ASSUMED AS 70mm UNLESS STATED OTHERWISE.

KERB WIDTH (IF NOT STANDARD) =

A member of our team will contact you to discuss install options if non standard kerb.

We will use 0.6kn/m to calculate the snow loading on this roof unless a site postcode is supplied.

FRAME COLOUR

GREY (RAL7016)

BLACK (RAL9005)

WHITE (RAL9003)

Bespoke Colour

BESPOKE RAL* _____

* Additional lead time required for bespoke colours.

GLASS OPTION

CLEAR

BLUE

Glass is either 26mm or 28mm depending on the size of the skylight.

Outer - 6mm Toughened

16mm Argon filled with Warm Edge

Inner - 4mm or 6mm Low-E Toughened

Glass U-Value is 1.0

DISCLAIMER

The builder/installer is responsible for providing/checking the structural deck. Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. The roof glass is NOT suitable to walk on.

Date: / /

Sign: Print:

Please note: If none of the boxes are ticked we will take as **STANDARD**
 For further information please refer to our structural information guide.
 Our conditions of sale shall apply to the sale of the goods to the exclusion of all other terms, unless agreed in writing by TCR (Derby) Ltd.

